



HSD Durable Sand Pump Features

Complete special 2 years warranty.

Anti-wicking block prevents water incursion.




Built-in shaft mounted agitator suspends solids.

High Chromium Iron impeller.

Ductile Iron Casing.

3/4 HP motor

Performance Range

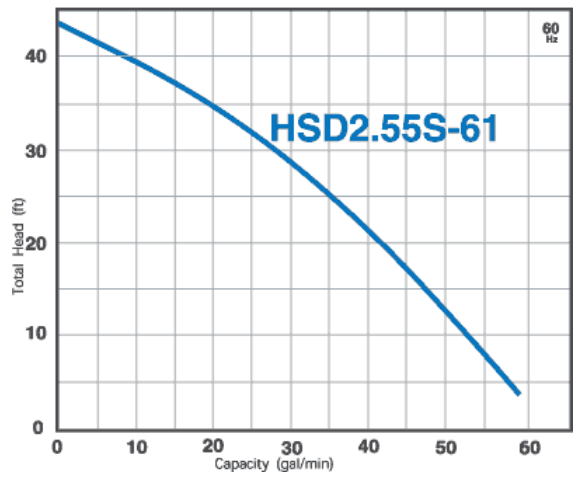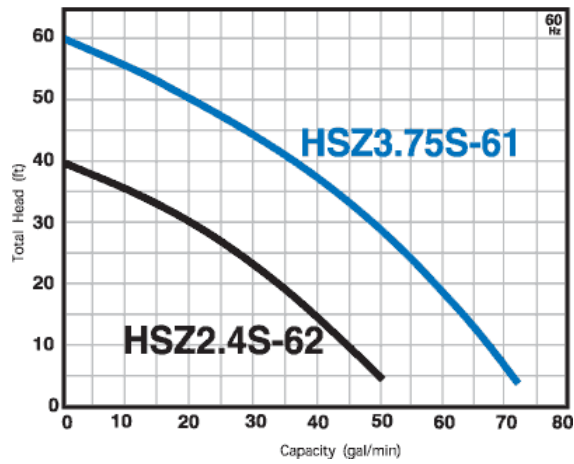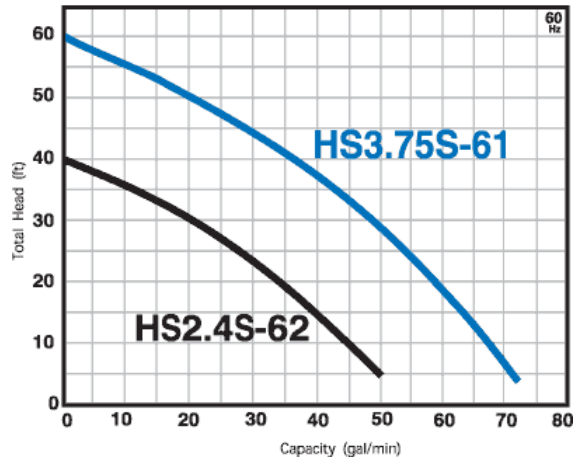

Model	Discharge Bore (inch)	Ship Weight (lbs.)	Cable Length (ft.)	Dimensions (inch)	
				Diameter	Height
HS2.4S-62	2	25	20	10	13
HS3.75S-61	3	42	32	12 1/2	15 1/4
HSZ2.4S-62	2	25	20	10	13
HSZ3.75S-61	3	42	32	12 1/2	15 1/4
HSD2.55S-61	2	33	16	6 3/8	15 3/8